

SPECIFIC NOTES THIS SHEET:

- ① PROVIDE AN EMERGENCY BALLAST IN THIS FIXTURE BY THE FIXTURE MANUFACTURER, 1000 LUMENS MINIMUM. CONNECT EM BALLAST TO UNSWITCHED 120V. THIS MAY REQUIRE REWORKING THE EXISTING CIRCUITRY BACK TO THE CONTROLS.
- ② PROVIDE AN EXIT SIGN THIS LOCATION. WHITE WITH RED LETTERS. COOPER SLX7-0-R-WH. PROVIDE ALL MOUNTING ACCESSORIES. CONNECT TO UNSWITCHED 120V FROM LIGHTING CIRCUITRY.
- ③ CHECK EXISTING EMERGENCY FIXTURES IN READING 100 AND BRING ANY DEFICIENCIES TO THE ATTENTION OF THE ARCHITECT.


GENERAL NOTES THIS SHEET

- A. NEW LIGHTING SHALL REPLACE THE EXISTING LIGHTING AS SHOWN. USE EXISTING CIRCUITRY AND CONTROLS FROM LIGHTING REMOVED. PROVIDE NEW WHIPS TO FIXTURES AS REQUIRED.
- B. THE EXISTING FIXTURES IN THE LOCATIONS WHERE THE NEW F1 FIXTURES ARE SHOWN HAVE A REMOTE BALLAST THAT IS TO BE REMOVED. IF NECESSARY, EXTEND NEW WIRING FROM THAT LOCATON TO THE NEW FIXTURES AS REQUIRED. EXISTING CONDUIT CAN BE USED IF IN GOOD CONDITION.
- C. ALL CONDUIT SHALL BE MINIMUM 1/2" AND CONTAIN A #12 MINIMUM GROUND.

1 LIGHTING PLAN
E-2

scale: 1/8" = 1'-0"

LIGHTING FIXTURE SCHEDULE		
MARK	DESCRIPTION AND CATALOG NUMBER	LAMP TYPE
F1	DIRECT/INDIRECT PENDANT WITH ALL MOUNTING HARDWARE PRUDENTIAL P4030-LED4HO-VWA-TMW-D9-SC-UNV-MPCA48-SSC-X3-ND 120V	LED
F2	2X4, LED, .125" MIN LENS, 50W COOPER 2GR-LD1-48-A125MIN-UNV-L840-C01 120V	LED
F3	SAME AS F2 EXCEPT 6400 LUMENS, 70W 120V	LED
F4	NOT USED 120V	LED
F5	SAME AS F2 EXCEPT 2X2, 4300 LUMENS 120V	LED

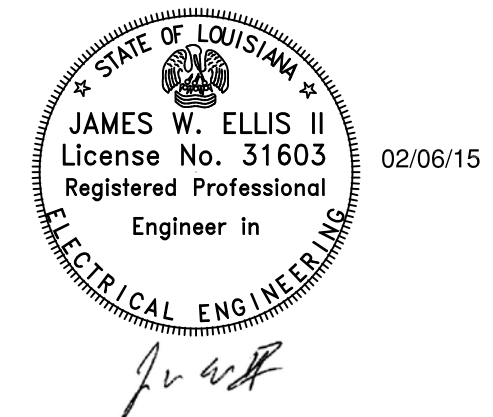

ELLIS ENGINEERING, L.L.C.	108 ROYAL CRESCENT DR. BELLE CHASSE, LA 70037 (504) 415-7670
	PROJECT No. 14017
JAMES W. ELLIS II, P.E., LOUISIANA LICENSE # 31603	

BURGDahl & GRAVES
A.I.A. ARCHITECTS
A PROFESSIONAL CORPORATION · PHONE (504) 566-4433

RENOVATIONS TO
LIVE OAK LIBRARY
FOR
JEFFERSON PARISH
125 ACADIA DRIVE WAGGAMAN, LA

DATE: 01.30.2015
DRAWN BY:
REVISIONS:

E-2
SHEET 12 OF 13